

## RX-W22



A smart 22" widescreen surveillance display with hard glass protection and Anti-Burn-in™ technology designed specifically for advanced for advanced 24/7 security environments.

The RX-W22 redefines the security display with the convenience and cost-competitiveness of the widescreen format. Features include NeoV™ Optical Glass protection, image burn-in prevention, swift 0.8 second switching time, Mask Mode and automatic recovery of video settings after a power interruption. The VESA compatible mounts and thin profile allow for multiple displays to be installed in any surveillance configuration. Expressly designed and tested for commercial video security applications, the RX-W22 delivers the performance expected of a high-end security display.

- > 22" widescreen format
- > High 1000:1 contrast ratio
- > NeoV™ Optical Glass
- > Distinctive bezel design and durable metal casing
- > Anti-Burn-in™ technology to prevent image sticking
- > Mask Mode to reduce image distortion
- > Quick signal-switching time ( $\leq 0.8$  sec.)
- > Real-time image display with no time lag
- > Automatic recovery of video settings after power interruptions
- > Video looping output supports auto termination
- > Supports NTSC/PAL/SECAM video systems
- > Kensington® security socket
- > VESA standard wall mount
- > Rigorous screening of the components for mission-critical 24/7 applications



NeoV™ Optical Glass - The most trusted hard glass protection available. Only on AG Neovo displays



# RX-W22

## Specifications

## RX-W22


Panel	Panel Type	TFT LCD
	Panel Size	22.0" (559 mm)
	Max. Resolution	WSXGA+ 1680 x 1050
	Pixel Pitch	0.282 mm
	Brightness	300 cd/m <sup>2</sup> (Typical)
	Contrast Ratio	1000:1 (Typical)
	Viewing Angle (H/V)	170°/160° (Typical)
	Display Colour	16.7M
	Response Time	3 ms (GTG)
Frequency (H/V)		H: 30 kHz – 83 kHz V: 56 Hz - 75 Hz
Input	Analogue	15-Pin D-Sub
	Digital	24-Pin DVI-D
	BNC Security	BNC Connector
Input Signal	Analogue	RGB H.V Sync
	Digital	TMDS
	Composite	NTSC/PAL/SECAM
Output Connector	BNC Security	BNC Connector
Power	AC-DC Adaptor	External
	Power	AC 100 - 240 V, 50 - 60 Hz
	Consumption	< 48 W (On) < 2 W (Off)
NeoV™ Optical Glass	Thickness	3.0 mm (0.12")
	Reflection Rate	< 1%
	Transmission Rate	> 96%
	Coating Hardness	> 9H
Plug & Play	VESA	DCC 2B, DCC/CI
Operating Conditions	Temperature	0 °C ~ 40 °C
	Humidity	10% ~ 90%
Storage Conditions	Temperature	-20 °C ~ 60 °C
	Humidity	5% ~ 95%
Mounting	VESA FPMPMI	Yes (100 mm)
Tilt	Tilt	0° ~ +20°
Dimensions	Product (W x H x D)	512 x 392 x 155 mm (20.2" x 15.4" x 6.1")
	Packaging (W x H x D)	586 x 508 x 195 mm (23.1" x 20.0" x 7.7")
Weight	Product Weight	6.9 kg (15.2 lbs)
	Packaged Product Weight	10.5 kg (23.1 lbs)
Regulation Approval	Certifications & Compliance	TUV/Baurt, CB, CE, GOST-R, WEEE, RoHS, Vista/Premi- num, REACH
Accessories	Supplied	Quick Guide, CD ROM (user manual and drivers), power cord, power adaptor, 15-Pin D-Sub cable, 24-Pin DVI-D cable, CVBS BNC connector cable



Available in black or white



NeoV™ Optical Glass for hard glass protection and strong metal casing for secure mounting

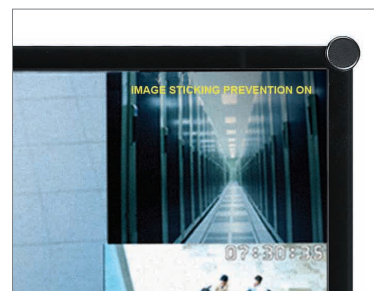

Anti-Burn-in™ technology prevents image sticking



Looping BNC video connector for multiple display connections

